


# SI Type



1. Part Number (產品名稱) :

|          |      |               |   |           |   |               |         |
|----------|------|---------------|---|-----------|---|---------------|---------|
| R5A      | SI   | 3.2           | X | 2.5       | X | 2.0           |         |
| Material | Type | OD(A $\phi$ ) |   | Length(D) |   | Thickness(B)  |         |
| 材質       | 類別   | 外徑            |   | 長度        |   | 高度            |         |
| R5A      | SI   | 3.2           | X | 2.5       | X | 2.0           | (T)     |
| Material | Type | OD(A $\phi$ ) |   | Length(D) |   | Thickness (B) | Plating |
| 材質       | 類別   | 外徑            |   | 長度        |   | 高度            | 鍍銀      |

2. Applicable Material (適用材質) :  
**R5A,S5A,R8H,R9H,DS6**

3. Shape (形狀) :

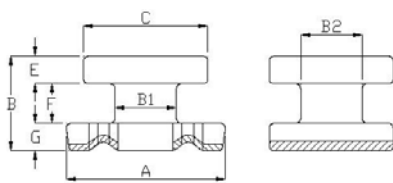


Fig.1

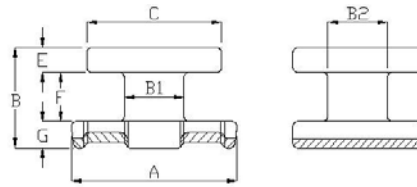


Fig.2




Fig.3

斜線部分為電鍍處理

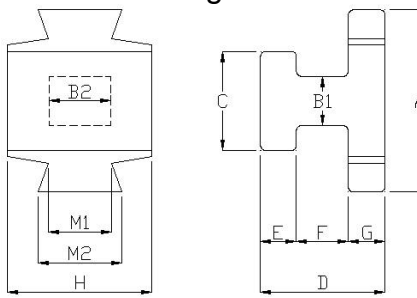


Fig.4

#### 4. Dimension (尺寸):

| No | Part Number       | Fig. | A         | D         | B         | B1        | B2        | C         | E         | F         | G         |
|----|-------------------|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 1  | SI 2.0×1.5×1.7(T) | 1    | 2.00±0.10 | 1.50±0.10 | 1.70±0.30 | 0.80±0.10 | 0.80±0.10 | 1.50±0.20 | 0.40±0.10 | 0.90±0.10 | 0.40±0.10 |
| 2  | SI 2.5×2.0×1.8(T) | 1    | 2.50±0.30 | 2.00±0.20 | 1.80±0.30 | 1.00±0.10 | 1.00±0.10 | 2.00±0.20 | 0.50±0.10 | 0.50±0.10 | 0.70±0.10 |
| 3  | SI 3.2×1.6×1.7(T) | 1    | 3.20±0.15 | 1.60±0.20 | 1.70±0.10 | 1.20±0.10 | 1.00±0.10 | 2.50±0.20 | 0.50±0.10 | 0.70±0.15 | 0.50±0.10 |
| 4  | SI 3.2×2.5×2.0(T) | 1    | 3.20±0.15 | 2.50±0.15 | 2.00±0.15 | 1.20±0.10 | 1.10±0.10 | 2.50±0.15 | 0.50±0.15 | 0.80±0.15 | 0.70±0.15 |
| 5  | SI 4.5×3.2×2.6(T) | 1    | 4.50±0.20 | 3.20±0.20 | 2.60±0.20 | 1.85±0.15 | 1.65±0.15 | 3.60±0.20 | 0.60±0.10 | 1.20±0.15 | 0.80±0.15 |
| 6  | SI 4.5×3.2×2.6(T) | 2    | 4.50±0.20 | 3.20±0.20 | 2.60±0.20 | 1.85±0.15 | 1.65±0.15 | 3.60±0.20 | 0.60±0.10 | 1.20±0.15 | 0.80±0.15 |
| 7  | SI 4.5×3.2×2.6(T) | 3    | 4.50±0.20 | 3.20±0.20 | 2.60±0.20 | 1.85±0.15 | 1.65±0.15 | 3.60±0.20 | 0.60±0.10 | 1.20±0.15 | 0.80±0.15 |
| 8  | SI 5.7×4.7×5.0(T) | 1    | 5.70±0.20 | 5.00±0.15 | 4.70±0.15 | 3.00±0.15 | 3.00±0.15 | 5.00±0.15 | 1.00±0.10 | 2.20±0.15 | 1.50±0.10 |
| 9  | SI 6.5×4.45×2.4   | 4    | 6.50±0.15 | 2.40±0.20 | 1.80±0.10 | 2.00±0.10 | 3.70±0.10 | 0.60±0.05 | 1.20±0.10 | 0.60±0.05 | 4.45±0.15 |
| 10 | SI 8.8×6×4.4      | 4    | 8.80±0.30 | 4.40±0.20 | 2.40±0.15 | 2.65±0.15 | 4.80±0.15 | 0.90±0.15 | 2.60±0.20 | 0.90±0.15 | 6.00±0.20 |